



PushOpen Solutions

2020

Important Information

Technical information

While every effort has been made in the production of this catalogue to ensure the accuracy of information, our products are continually being revised and users should confirm the up to date specification before ordering. Due to constant improvement of products presented in the catalogue, we can make changes at any time and without notice.

Responsibility

It is the responsibility of the user to ensure the fitness of hardware for the intended purpose. We recommend assessment by appropriate testing in the application and by technical enquiry to our representatives.

Intellectual property

Titus Group owns the intellectual property rights in its products worldwide whether as trademarks, patents, intellectual, copyright, designs, illustrations, drawings and the 'know how' contained in their design and production. Titus Group respects the equivalent rights in competitors and all other relevant product design rights. To our knowledge our products do not infringe any intellectual property rights of competitors or other parties. Titus Group takes infringements of its rights seriously and will rigorously defend these rights to the full extent of the law.

*Non preferred articles

All Item numbers in the catalogue marked with * are for non preferred items available on extended delivery times.

Trademarks

Titus and Titusonic are registered trademarks of Titus International Ltd. Lama is a registered trademark of Titus d.o.o. Dekani, WoodWelding is a registered trademark of WW SA.

PushOpen Solutions

Product Guide

Page

PushOpen Solutions	
Push Latch	10
PushOpen - Short	12
PushOpen - Long	14

	Cranking	Opening angle	Cup type	
Hinges				
T-type 110 PushOpen Hinge	0mm	110°	for wood door	16
	5mm	110°	for wood door	16
	9mm	110°	for wood door	18
T-type Mounting Plates				20
S-type 110 PushOpen Hinge	0mm	110°	for wood door	24
	9mm	110°	for wood door	24
S-type Mounting Plates				26

Concealed Hinges

Drilling Patterns

Drilling Patterns for Hinge Cup

Interaxis
45mm and 48mm

- T-type
- S-type


	Interaxis 45mm	Interaxis 48mm
Hinge cup type	Drilling pattern	Drilling pattern
 Screw-on ready		
 Pre-mounted Ø4.5mm screws		
 Machine insertion ready		
 Pre-mounted expando dowels		
 Easy-fix system		
 Pre-mounted euro screws		

Interaxis is the distance between two holes center for fixing screws on the hinge cup.

Concealed Hinges

Adjustment

Height Adjustment





Height adjustment is necessary to achieve optimal vertical door position.



By rotating the cam adjuster

Height adjustment is made by rotating the cam adjuster on the mounting plate.



T-type with cam adjustable cruciform mounting plate



T-type with cam adjustable horizontal mounting plate



S-type with cam adjustable cruciform mounting plate



Concealed Hinges


Adjustment

Height Adjustment


By releasing the screws in slot

- T-type and S-type with cruciform mounting plate

For height adjustment the two mounting plate fixing screws have to be temporarily released while making the manual adjustment.

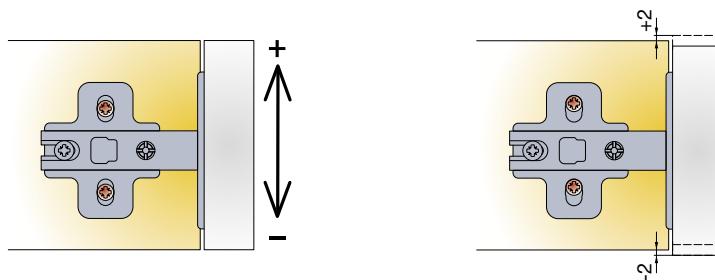

Side Adjustment






Side adjustment aligns the door with the side of the cabinet.

By rotating the adjustment screw


- T-type
- S-type

Side adjustment is made by rotating the screw on the hinge arm.



Adjustment range
+3/-1mm

Depth Adjustment





The system enables easy adjustment of the gap between door and cabinet.

By rotating the cam adjuster

Rotate the cam adjuster on the hinge arm.



· T-type



By releasing the adjustment screw


Depth adjustment is made by temporarily releasing the adjustment screw. After the adjustment is made the screw has to be re-tightened.

· S-type



Push Latch

For wood doors and drawers

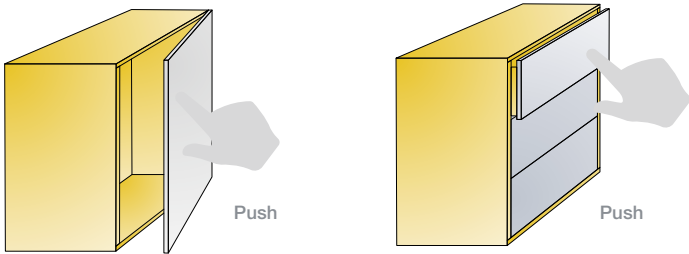

Push Latch



Push Latch



Cruciform mounting plate




Linear mounting plate


	Spring force [N] (released)	Spring force [N] (loaded)	Item number	Bronze
With bumper	10	20	915-0X59 →	381
With bumper	13	27	915-0320 →	381
With magnet	10	20	915-0D22 →	381
Linear m. plate			915-4175 →	381
Cruciform m. plate			915-4183 →	381
Sets:				
With bumper	Cruciform m. plate		Linear m. plate	
	915-0X59-381-K1		915-0X59-381-K2	
With magnet	915-0D22-381-K1		915-0D22-381-K2	

200 Pcs Made of steel and plastic

Fixing screws for mounting plates




Euro screws
821-6323-050
5000 Pcs



Chipboard screws
820-6328-050
10000 Pcs


Accessories for Push Latch with magnet (Nickel plated steel)

Counter plate self adhesive



A = Ø15 915-7159-050 500 Pcs


Counter plate



A = Ø10 B = Ø5 915-7196-050 500 Pcs

A = Ø15 B = Ø8 915-7190-050 500 Pcs


Knock-in Counter plate



A = Ø10 B = Ø2.8 915-7199-050 500 Pcs

- Effortless opening with just a light touch
- Depth adjustment ensures reliable closing and consistent performance in case of inaccurate drilling
- 'Safety click' feature for easy detachment of the mechanism from its mounting plate

Door adjustment






Depth adjustment
+4.5/-1mm

i PushOpen with bumper works with standard hinge
PushOpen with magnet works with reverse spring or unsprung hinges


Drilling pattern

Dimensions


Depth adjustment

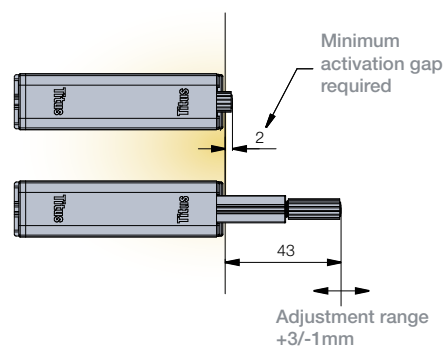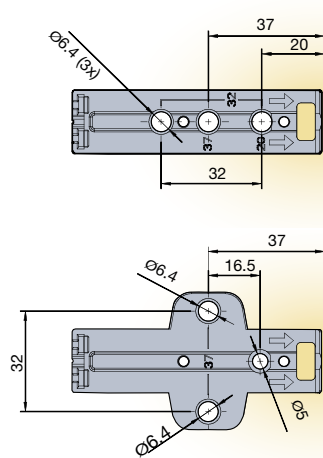


Positioning



Close to the 'touch opening point' on the side opposite to hinges






On the cabinet side; gap between drawer and cabinet side 12mm min




On the drawer bottom; in the middle of drawer

PushOpen Short



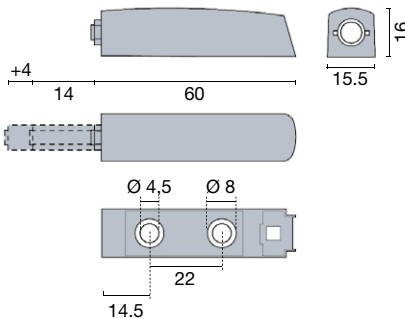		Technical details		Stroke [mm]		Item number		White	Grey	Lead grey	Black
PushOpen Short	With bumper	14	915-7187 →	350	380	383	390				
	With magnet	14	915-7185 →	350	380	383	390				
 											
 100 Pcs Made of steel and plastic											
Housing Short			915-7192 →	350	380	383	390				
	 										
 100 Pcs Made of plastic											


Fixing screws for housing



Chipboard screws
820-6328-050
10000 Pcs


Accessories for PushOpen with magnet (Nickel plated steel)

Counter plate self adhesive



A = Ø15 915-7159-050 500 Pcs


Counter plate



A = Ø10 B = Ø5 915-7196-050 500 Pcs

A = Ø15 B = Ø8 915-7190-050 500 Pcs

Knock-in Counter plate




A = Ø10 B = Ø2.8 915-7199-050 500 Pcs

- Effortless opening with just a light touch
- Depth adjustment ensures reliable opening

Door adjustment




PushOpen with bumper works with standard hinge
PushOpen with magnet works with reverse spring or unsprung hinges



Drilling pattern and mounting procedure




Depth adjustment

Without housing



Adjustment made by rotating the depth adjustment screw


With housing




Application on door for Counter plates

Application on door for Counter plate with double side tape and knock-in counter plate


Positioning



Pre-drilled hole
ØB x 10mm



Sticking or knock-in
position




Close to the 'touch opening point'
on the side opposite to hinges

- Effortless opening with just a light touch
- Depth adjustment ensures reliable opening

Door adjustment




PushOpen with bumper works with standard hinge
PushOpen with magnet works with reverse spring or unsprung hinges



Drilling pattern and mounting procedure




Depth adjustment

Without housing

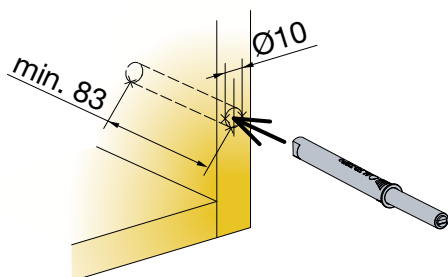

Adjustment made by rotating the depth adjustment screw


With housing

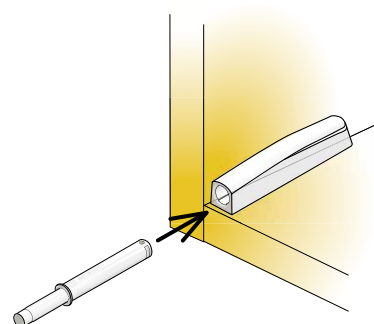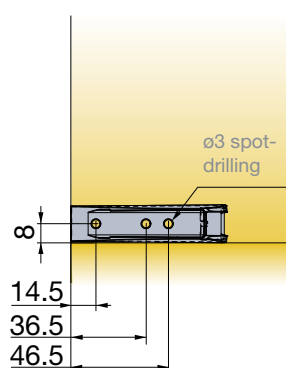


Application on door for Counter plates

Application on door for Counter plate with double side tape and knock-in counter plate


Positioning



Pre-drilled hole
ØB x 10mm






Sticking or knock-in
position



Close to the 'touch opening point'
on the side opposite to hinges

T-type 110 PushOpen Hinge

For wood doors



- Opening angle
- Drilling diameter for hinge cup
- Drilling depth
- Hinge on plate mounting system

110°
35mm
12mm
3Way snap-on






Technical details

	Interaxis 45mm	Interaxis 48mm
Cup type	Item number	Item number
	704-0593-054	704-0672-054
		704-0553-054

Drilling patterns for hinge cups → see page 6

Cranking

0mm






150 Pcs

Made of steel

Cranking

5mm



150 Pcs

Made of steel

	704-0661-054	704-0673-054
		704-0604-054

Drilling patterns for hinge cups → see page 6

Mounting plates



Cam adjustable cruciform mounting plate
→ see page 20



Cruciform mounting plate
→ see page 22




Cam adjustable horizontal mounting plate
→ see page 20



Face frame adapter plate
→ see page 22

Hinge cup screws

If not pre-mounted



820-6328-050

10000 Pcs

Accessories

Cover caps for hinge arm



For cranking
0mm



For cranking
0mm, 5mm,
9mm

Titus 728-1286-054
Neutral 728-1283-054

5000 Pcs

Titus 728-1287-054
Neutral 728-1284-054

5000 Pcs

Legend of hinge cup symbols

Screw-on ready
← screws


Easy-fix system



· Concealed hinge without spring for use with PushOpen mechanisms with magnet



→ see pages 10-15

Door adjustment

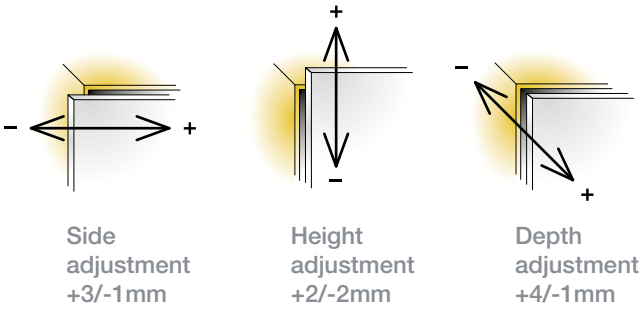


For further explanation → see pages 7-9

Mounting details






Mounting plate drilling distance



Mounting plate thickness table

X	13	14	15	16	17	18	19
K	3	3	2	1	0		
	4	4	3	2	1	0	
	5		4	3	2	1	0
	6			4	3	2	1
							D


$D=13+K-x$



X	8	9	10	11	12	13	14
K	3	3	2	1	0		
	4	4	3	2	1	0	
	5		4	3	2	1	0
	6			4	3	2	1
							D

$D=8+K-x$

Door clearance at R=1mm





V		16	17	18	19	20	21	22	23	24	25	26
K	3	0.5	0.7	0.8	1	1.2	1.5	1.7	2.1	2.8	4.1	5.5
	4	0.4	0.7	0.8	1	1.2	1.5	1.7	2.1	2.3	3.1	4.5
	5	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6	3.5
	6	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6	2.9

Gap Z_{MIN}=0

T-type 110 PushOpen Hinge



For wood doors

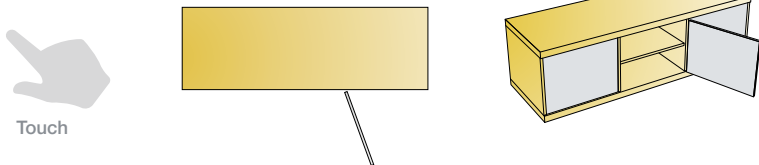



- Opening angle 110°
- Drilling diameter for hinge cup 35mm
- Drilling depth 12mm
- Hinge on plate mounting system 3Way snap-on



Technical details

	Interaxis 45mm	Interaxis 48mm
		
Cup type	Item number	Item number
	704-0595-054	704-0674-054
		704-0697-054

Cranking
9mm



Drilling patterns for hinge cups → see page 6

150 Pcs Made of steel

Mounting plates

-  Cam adjustable cruciform mounting plate → see page 20
-  Cruciform mounting plate → see page 22
-  Cam adjustable horizontal mounting plate → see page 20
-  Face frame adapter plate → see page 22

- Hinge cup screws
If not pre-mounted
- Accessories
- Cover caps for hinge arm




For cranking
0mm, 5mm,
9mm

820-6328-050
10000 Pcs

Titus 728-1287-054
Neutral 728-1284-054
5000 Pcs


Legend of hinge cup symbols

-  Screw-on ready
-  Easy-fix system
-  ← screws

• Concealed hinge without spring for use with PushOpen mechanisms with magnet

→ see pages 10-15

Door adjustment


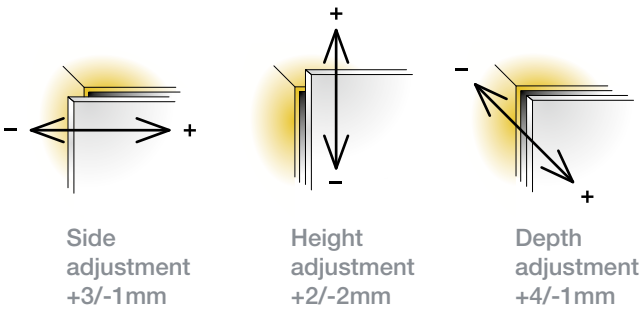


For further explanation → see pages 7-9

Mounting details

Mounting plate drilling distance


Mounting plate thickness table

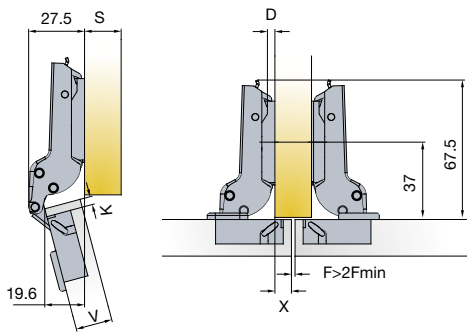

x	4	5	6	7	8	9	10
K	3	3	2	1	0		
	4	4	3	2	1	0	
	5		4	3	2	1	0
	6			4	3	2	1
							D

$D=4+K-x$

Door clearance at R=1mm




V		16	17	18	19	20	21	22	23	24	25	26
K	3	0.5	0.7	0.8	1	1.2	1.5	1.7	2.1	2.8	4.1	5.5
	4	0.4	0.7	0.8	1	1.2	1.5	1.7	2.1	2.3	3.1	4.5
	5	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6	3.5
	6	0.4	0.6	0.7	0.9	1.1	1.4	1.6	2	2.2	2.6	2.9
		F _{MIN}										

Gap Z_{MIN}=0

T-type Mounting Plates



3Way snap-on mounting

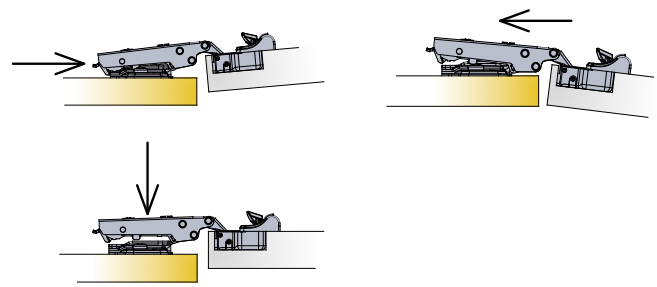

Cam adjustable cruciform
mounting plate 37mm

Drilling pattern



Dimensions



150 Pcs


Made of steel

Cam adjustable horizontal
mounting plate




150 Pcs


Made of steel and zinc








Mounting plate thickness

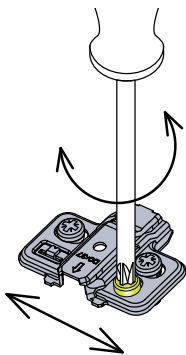

Height adjustment +2/-2mm

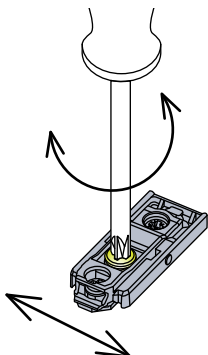



Height adjustment +2/-2mm


Mounting plate type	 15		 10.5	 15	 14.5	
Mounting plate thickness (D)	 min 11.5 15 Ø5 Item number	 min 10.5 Ø10 Item number	 min 10.5 Ø5 Item number	no pre-drilling required  min 15 Item number	 min 11.5 min 14.5 Ø3 Item number	
0mm	700-0KC0-054	700-0KB0-054	700-0KF0-054	700-0KA0-054	700-0KE0-054	
1mm	700-0KC1-054	700-0KB1-054	700-0KF1-054	700-0KA1-054	700-0KE1-054	
2mm	700-0KC2-054	700-0KB2-054	700-0KF2-054	700-0KA2-054	700-0KE2-054	
3mm	700-0KC3-054	700-0KB3-054	700-0KF3-054	700-0KA3-054	700-0KE3-054	
4mm	700-0KC4-054	700-0KB4-054	700-0KF4-054	700-0KA4-054	700- 0KE4-054	
0mm	700-0LC0-650	700-0LB0-650	700-0LF0-650			
2mm	700-0LC2-650	700-0LB2-650	700-0LF2-650			
3mm	700-0LC3-650	700-0LB3-650	700-0LF3-650			

Legend of mounting plate type symbols

 15
 
 10.5
  15
  14.5


Pre-mounted 15mm euro screws
 Machine insertion ready
 Pre-mounted 10.5mm expanding dowels
 Pre-mounted chipboard screw
 Pre-mounted chipboard screw



T-type Mounting Plates



3Way snap-on mounting

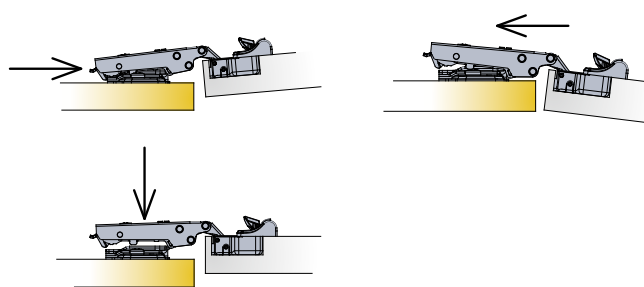

Cruciform mounting plate 37mm



Drilling pattern

Dimensions




150 Pcs Made of steel

Face frame mounting plate




150 Pcs Made of steel and zinc

Fixing screw for mounting plate
If not pre-mounted




Chipboard screws
820-6328-050


10000 Pcs








Mounting plate thickness

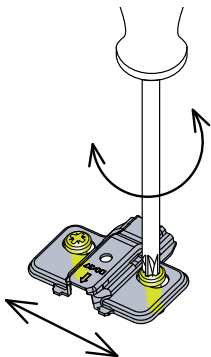

Height adjustment +2/-2mm

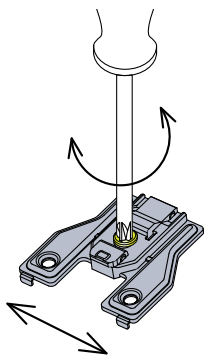

Height adjustment +2/-2mm

Mounting plate type		 15		 10.5	 14.5		
Mounting plate thickness (D)							
Item number							
0mm	700-0NA0-054	700-0NC0-054	700-0NB0-054	700-0NF0-054	700-0NE0-054		
1mm	700-0NA1-054	700-0NC1-054	700-0NB1-054	700-0NF1-054	700-0NE1-054		
2mm	700-0NA2-054	700-0NC2-054	700-0NB2-054	700-0NF2-054	700-0NE2-054		
3mm	700-0NA3-054	700-0NC3-054	700-0NB3-054	700-0NF3-054	700-0NE3-054		
4mm	700-0NA4-054	700-0NC4-054	700-0NB4-054	700-0NF4-054	700-0NE4-054		
0mm						700-0KW0-054	
3mm						700-0KW3-054	

Legend of mounting plate type symbols


 15

 10.5
 14.5


Screw-on ready for chipboard screws
← screws




Pre-mounted 15mm euro screws

Machine insertion ready

Pre-mounted 10.5mm expanding dowels




Pre-mounted chipboard screw



S-type 110 PushOpen Hinge

For wood doors




- Opening angle
- Drilling diameter for hinge cup
- Drilling depth
- Hinge on plate mounting system

110°
35mm
11.5mm
snap-on




Cranking
0mm





200 Pcs Made of steel

Cranking
9mm



200 Pcs Made of steel

	Interaxis 45mm	Interaxis 48mm
		
Cup type	Item number	Item number
	915-0Z98-050	915-0Z99-050

Drilling patterns for hinge cups → see page 6

	915-0781-050	915-0896-050
---	--------------	--------------

Drilling patterns for hinge cups → see page 6


Mounting plates

 Cam adjustable mounting plate
→ see page 26

 Steel mounting plate
→ see page 28

 Zinc diecast mounting plate
→ see page 28

 Face frame adapter
→ see page 30

Hinge cup screws
If not pre-mounted


Accessories
Cover caps for hinge arm




Titus 748-1646-050
Neutral 748-1712-050

4000 Pcs

820-6308-050
10000 Pcs

Legend of hinge cup symbols


 Screw-on ready
← screws



- Hinge with reverse spring
- Effortless opening with just a light touch
- Use with PushOpen mechanisms with magnet


→ see pages 10-15

Door adjustment

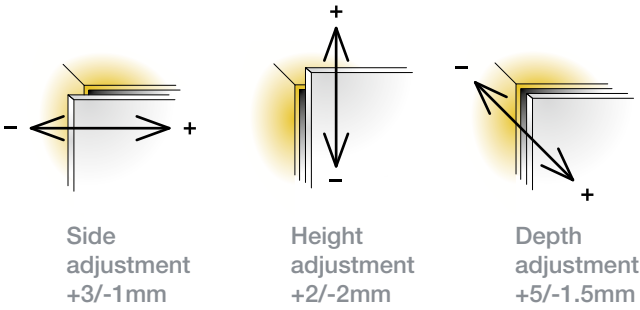


For further explanation → see pages 7-9

Mounting details



Drawings show application on D=0mm thick mounting plate


Mounting plate drilling distance




Mounting plate thickness table

x	13	14	15	16	17	18
3	3	2	1	0		
K 4		3	2	1	0	
5			3	2	1	0

D=13+K-x




Drawings show application on D=0mm thick mounting plate



x	4	5	6	7	8	9
3	3	2	1	0		
K 4		3	2	1	0	
5			3	2	1	0

D=4+K-x



Door clearance at R=1mm


V	16	17	18	19	20	21	22
3	0.3	0.5	0.7	1.0	1.3	1.7	2.5
K 4	0.3	0.5	0.7	0.9	1.2	1.6	2.1
5	0.3	0.5	0.7	0.9	1.2	1.5	2.0

F_{MIN}

Gap Z_{MIN}=0

S-type Mounting Plates



S-type snap-on mounting

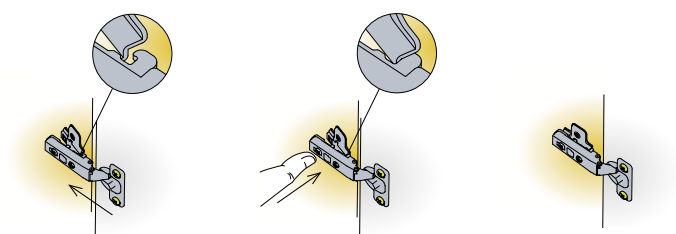

Cam adjustable cruciform
mounting plate 37mm


Drilling pattern

Dimensions








 200 Pcs

Made of steel

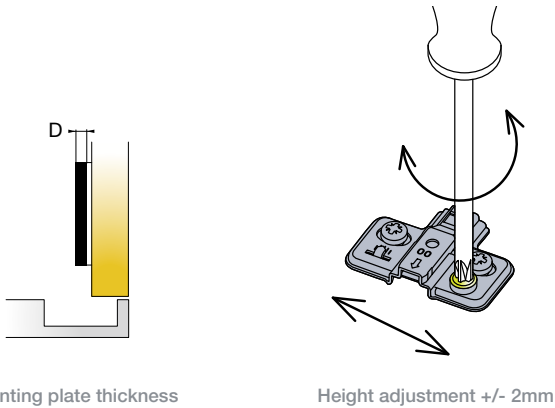

Mounting plate thickness

Height adjustment +/- 2mm

Mounting plate type	 13	 15			 10.5	
Mounting plate thickness (D)						
Item number						
0mm	244-0258-050	244-0261-050	*244-0264-050	*244-0342-050	244-0270-050	
2mm	244-0259-050	244-0262-050	*244-0265-050	*244-0343-050	244-0271-050	
3mm	244-0260-050	244-0263-050	*244-0266-050	*244-0344-050	244-0272-050	
* Available upon special request → see page 3						

Legend of mounting plate type symbols


 **13**
 Pre-mounted
 13mm euro screws

 **15**
 Pre-mounted
 15mm euro screws


 Pre-mounted
 chipboard screws



 Machine
 insertion ready

 **10.5**
 Pre-mounted
 10.5mm
 expanding dowels



S-type Mounting Plates



S-type snap-on mounting

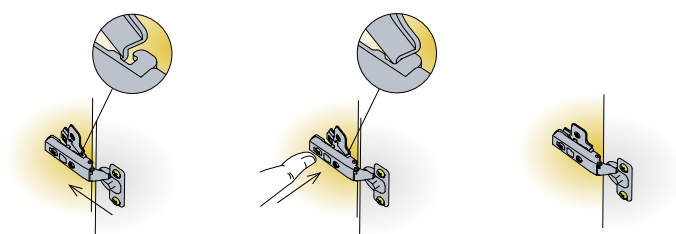

Steel mounting plate 37mm



Drilling pattern

Dimensions




 200 Pcs Made of steel

Zinc diecast cruciform
mounting plate 37mm




 200 Pcs Made of zinc

Fixing screws for mounting plates
If not pre-mounted




Euro screws
821-6304-050 L=11
821-6323-050 L=13
821-6332-050 L=15

 5000 Pcs




Chipboard screws
820-6328-050









 10000 Pcs







Mounting plate thickness

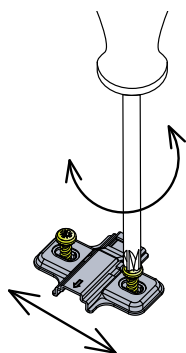

Height adjustment +/- 2mm

Mounting plate type			 11	 13	 15			 10.5
Mounting plate thickness (D)								
Item number								
0mm	244-1136-050	*244-1233-050	244-0Z26-050	244-0134-050	244-0118-050	*244-0136-050	*244-0166-050	244-0P26-050
1mm	244-1137-050	*244-1228-050		244-0561-050		*244-0565-050	*244-0567-050	
2mm	244-1138-050	*244-1229-050	244-0Z63-050	244-0562-050	244-0120-050	*244-0566-050	*244-0568-050	244-0V19-050
3mm	244-1139-050	*244-1234-050		244-0135-050	244-0119-050	*244-0137-050	*244-0167-050	244-0P27-050
6mm	244-1645-050				244-0Z51-050			
* Available upon special request → see page 3 * Mounting plates with pre-mounted 7.5mm expanding dowels available upon special request → see page 3								
9mm	244-3651-650			244-0M33-650	244-0P29-650			
18mm	244-3016-650			244-0085-650	244-0095-650			
* Available upon special request → see page 3								

Legend of mounting plate type symbols


		 11	 13	 15			 10.5
Screw-on ready for euro screws ← screws	Screw-on ready for chipboard screws ← screws	Pre-mounted 11mm euro screws	Pre-mounted 13mm euro screws	Pre-mounted 15mm euro screws	Pre-mounted chipboard screws	Machine insertion ready	Pre-mounted 10.5mm expanding dowels
							



S-type

Face Frame


Mounting Plates

S-type snap-on mounting

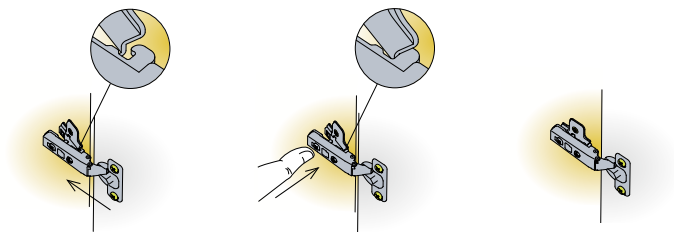


	Drilling pattern	Dimensions
Face frame adapter for S-type hinges 		
 200 Pcs Made of zinc		

Fixing screw for mounting plates




Chipboard screws
820-6328-050

 10000 Pcs



Mounting plate thickness

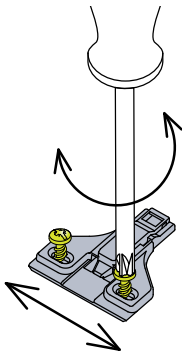


Height adjustment +/- 2mm

Mounting plate type		
Mounting plate thickness (D)		
Item number		
0mm	244-3653-650	
3mm	244-3654-650	
6mm	244-3655-650	

Legend of mounting plate type symbols




Screw-on ready for chipboard screws
← screws



Global player

Worldwide design, manufacturing and distribution capabilities

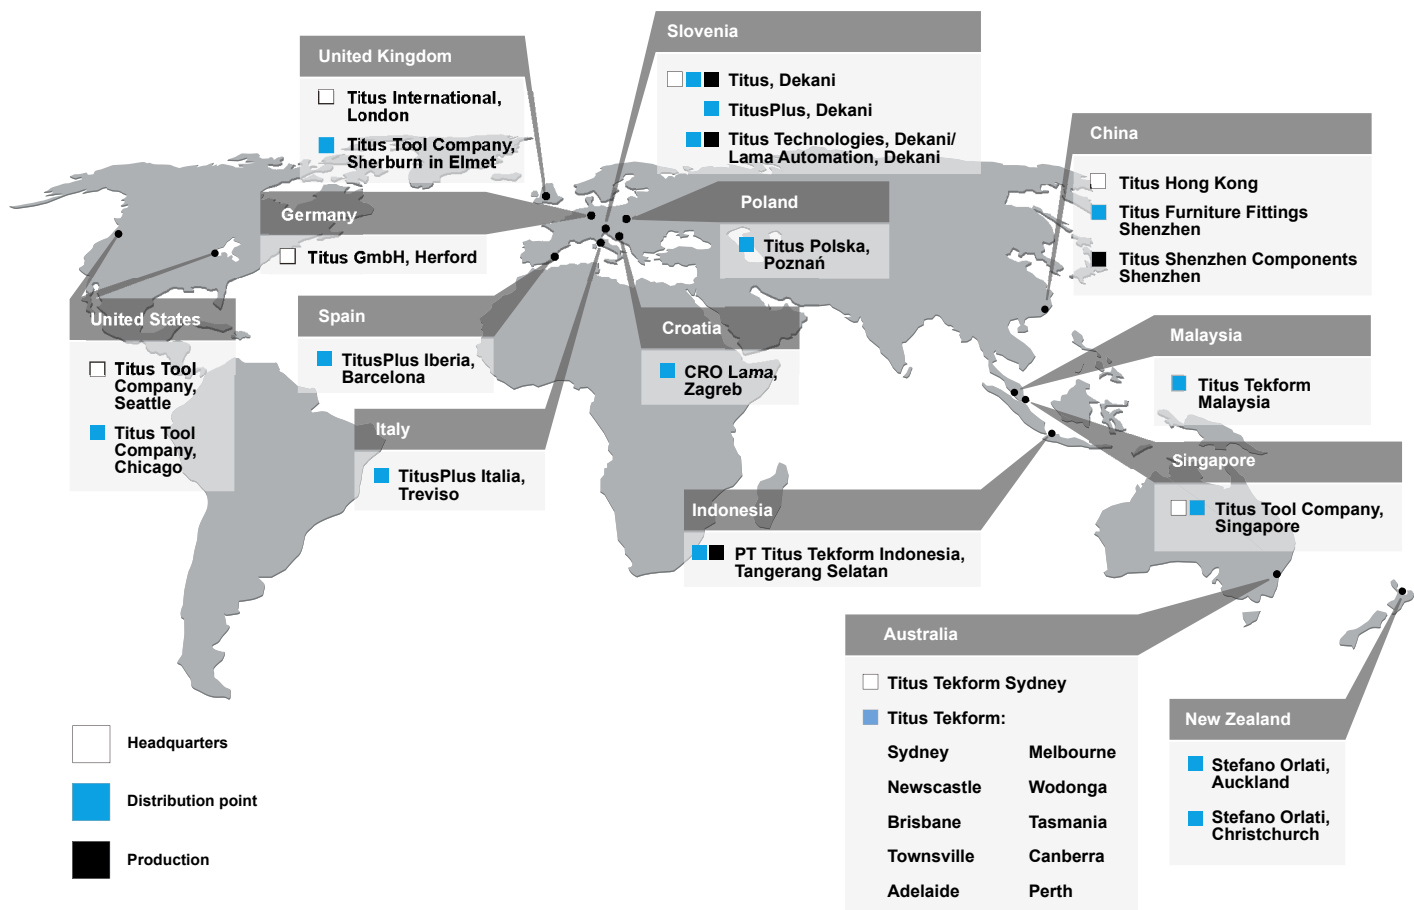

Europe

TitusPlus d.o.o.
Dekani 5
SI-6271 Dekani
Slovenia
+386 566 90 213
+386 566 90 205 Fax
info@titusplus.com

Titus d.o.o. Dekani
Dekani 5
SI-6271 Dekani
Slovenia
+386 566 90 213
+386 566 90 205 Fax
info@titusplus.com

**Titus Technologies
Lama Avtomatizacija d.o.o.**
Dekani 5
SI-6271 Dekani
Slovenia
+386 566 90 146
technologies@titusplus.com

Titus Tool Company Ltd.
10 Blackburn Industrial Estate
Enterprise Way
Sherburn in Elmet
LS256NA
United Kingdom
+44 1977682 582
+44 1977680 481 Fax
uk@titusplus.com

CRO LAMA d.o.o.
Rakitska 10a
Rakitje
HR-10437 Bestovje
Croatia
+385 1 3323 033
+385 1 3323 233 Fax
croatia@titusplus.com

Titus Polska Sp. z o.o.
ul. Stefańskiego 17 A
PL-62-002 Suchy Las/Poznań
Poland
+4861 811 5402 Phone/Fax
+4861 811 5684 Phone/Fax
+4861 821 9362
poland@titusplus.com

TitusPlus Italia S.r.l.
Via Aquileia 9
Frazione Olmi
31048 San Biagio di Callalta (TV)
+39 04 221 650 120
+39 04 221 650 136 Fax
italia@titusplus.com

TitusPlus Iberia S.L.U.
C/ Gran Bretanya 34
08520 Les Franqueses del Valles
(Barcelona)
+34 938 715 404
+34 938 605 498 Fax
iberia@titusplus.com

Titus GmbH, Herford
Lübberlindenweg 12
D-32049 Herford
Germany
+ 49 5221 102488-0
germany@titusplus.com

America

Titus Tool Co. Inc.
2800 156th Avenue SE
Suite 135
Bellevue, WA 98007, USA
800 762 1616 toll free
+1 425 746 2080
+1 425 746 2344 Fax

Titus Tool Co. Inc.
11056 W. Addison Street
Franklin Park, IL 60131, USA
+1 253 872 2829
+1 253 872 2827 Fax
usa@titusplus.com

Australia and New Zealand

Titus Tekform Pty Ltd
Unit 1, 41-43 Whyalla Place
Prestons NSW 2170
Australia
+61 2 9286 0007
+61 2 9826 0074 Fax
www.titustekform.com.au
info@titustekform.com.au

Stefano Orlati Ltd
34 Waipareira Avenue
Henderson
Auckland, New Zealand
+64 9 837 0886
+64 9 837 8003Fax
www.titustekform.com.au
info@titustekform.com.au

Asia

Titus Tool Co. Pte. Ltd.
5004 Ang Mo Kio Ave 5
Techplace II #04-01
Singapore 569872
+656383 3922
+656383 3178 Fax
singapore@titusplus.com

Titus Shenzhen Components Co. Ltd
1st Floor, Building No. 2
Heng Changrong High-tech Industrial Park
Shangnan South Road
Shangjin Street
Baoan District Shenzhen Province
China
+86 755 8348 0916
+86 8359 2676 Fax
china@titusplus.com

Titus Tekform Indonesia, PT
Taman Tekno Blok L2 / 7
BSD Sektor XI - Tangerang 15314
Indonesia
T. +62 21 75873578
F. +62 21 75873574
indonesia@titusplus.com

Headquarters

Titus International Ltd
325 Euston Road
London
NW1 3AD, United Kingdom
info@titusplus.com

www.titusplus.com
info@titusplus.com

Index

Item number	Page
244-0085-650	29
244-0095-650	29
244-0118-050	29
244-0119-050	29
244-0120-050	29
244-0134-050	29
244-0135-050	29
244-0136-050	29
244-0137-050	29
244-0166-050	29
244-0167-050	29
244-0258-050	27
244-0259-050	27
244-0260-050	27
244-0261-050	27
244-0262-050	27
244-0263-050	27
244-0264-050	27
244-0265-050	27
244-0266-050	27
244-0270-050	27
244-0271-050	27
244-0272-050	27
244-0342-050	27
244-0343-050	27
244-0344-050	27
244-0561-050	29
244-0562-050	29
244-0565-050	29
244-0566-050	29
244-0567-050	29
244-0568-050	29
244-1136-050	29
244-1137-050	29
244-1138-050	29
244-1139-050	29
244-1228-050	29
244-1229-050	29
244-1233-050	29
244-1234-050	29
244-1645-050	29
244-3016-650	29
244-3651-650	29
244-3653-650	31
244-3654-650	31
244-3655-650	31
244-0M33-650	29
244-0P26-050	29
244-0P27-050	29
244-0P29-650	29
244-0V19-050	29
244-0Z26-050	29
244-0Z51-050	29
244-0Z63-050	29

Item number	Page
700-0KA0-054	21
700-0KA1-054	21
700-0KA2-054	21
700-0KA3-054	21
700-0KA4-054	21
700-0KB0-054	21
700-0KB1-054	21
700-0KB2-054	21
700-0KB3-054	21
700-0KB4-054	21
700-0KC0-054	21
700-0KC1-054	21
700-0KC2-054	21
700-0KC3-054	21
700-0KC4-054	21
700-0KE0-054	21
700-0KE1-054	21
700-0KE2-054	21
700-0KE3-054	21
700-0KE4-054	21
700-0KF0-054	21
700-0KF1-054	21
700-0KF2-054	21
700-0KF3-054	21
700-0KF4-054	21
700-0KW0-054	23
700-0KW3-054	23
700-0LB0-650	21
700-0LB2-650	21
700-0LB3-650	21
700-0LC0-650	21
700-0LC2-650	21
700-0LC3-650	21
700-0LF0-650	21
700-0LF2-650	21
700-0LF3-650	21
700-0NA0-054	23
700-0NA1-054	23
700-0NA2-054	23
700-0NA3-054	23
700-0NA4-054	23
700-0NB0-054	23
700-0NB1-054	23
700-0NB2-054	23
700-0NB3-054	23
700-0NB4-054	23
700-0NC0-054	23
700-0NC1-054	23
700-0NC2-054	23
700-0NC3-054	23
700-0NC4-054	23
700-0NE0-054	23
700-0NE1-054	23
700-0NE2-054	23

Item number	Page
700-0NE3-054	23
700-0NE4-054	23
700-0NF0-054	23
700-0NF1-054	23
700-0NF2-054	23
700-0NF3-054	23
700-0NF4-054	23
704-0553-054	16
704-0593-054	16
704-0595-054	18
704-0604-054	16
704-0661-054	16
704-0672-054	16
704-0673-054	16
704-0674-054	18
704-0697-054	18
728-1283-054	16
728-1284-054	16, 18
728-1286-054	16
728-1287-054	16, 18
748-1646-050	24
748-1712-050	24
820-6308-050	24
820-6328-050	10, 12, 14, 16, 18, 22, 28, 30
821-6304-050	28
821-6323-050	10, 28
821-6332-050	28
915-0320-381	10
915-0781-050	24
915-0896-050	24
915-0D22-381	10
915-0D22-381-K1	10
915-0D22-381-K2	10
915-0X59-381	10
915-0X59-381-K1	10
915-0X59-381-K2	10
915-0Z98-050	24
915-0Z99-050	24
915-4175-381	12
915-4183-381	10
915-7159-050	10, 12, 14
915-7185	10
915-7186	14
915-7187	12
915-7188	14
915-7190-050	10, 12, 14
915-7192	12
915-7193	14
915-7196-050	10, 12, 14
915-7199-050	10, 12, 14

Notes

Your authorized dealer